



<u>Placement of railings and velcros on the front</u> <u>& rear doors of Toyota Corolla 11th Gen.</u>

Note: Zoom in on the image to better understand the placement.


Apply adhesive primer to the desired location before applying the Rails and Velcros.

Black text mentions the name & desired location of Rail and Velcro.

Green arrow is the starting point of the rail placement, leading towards the end. Red box indicates an important note to prevent installation failure.



Rail: Front-Up On base of the metal surface.

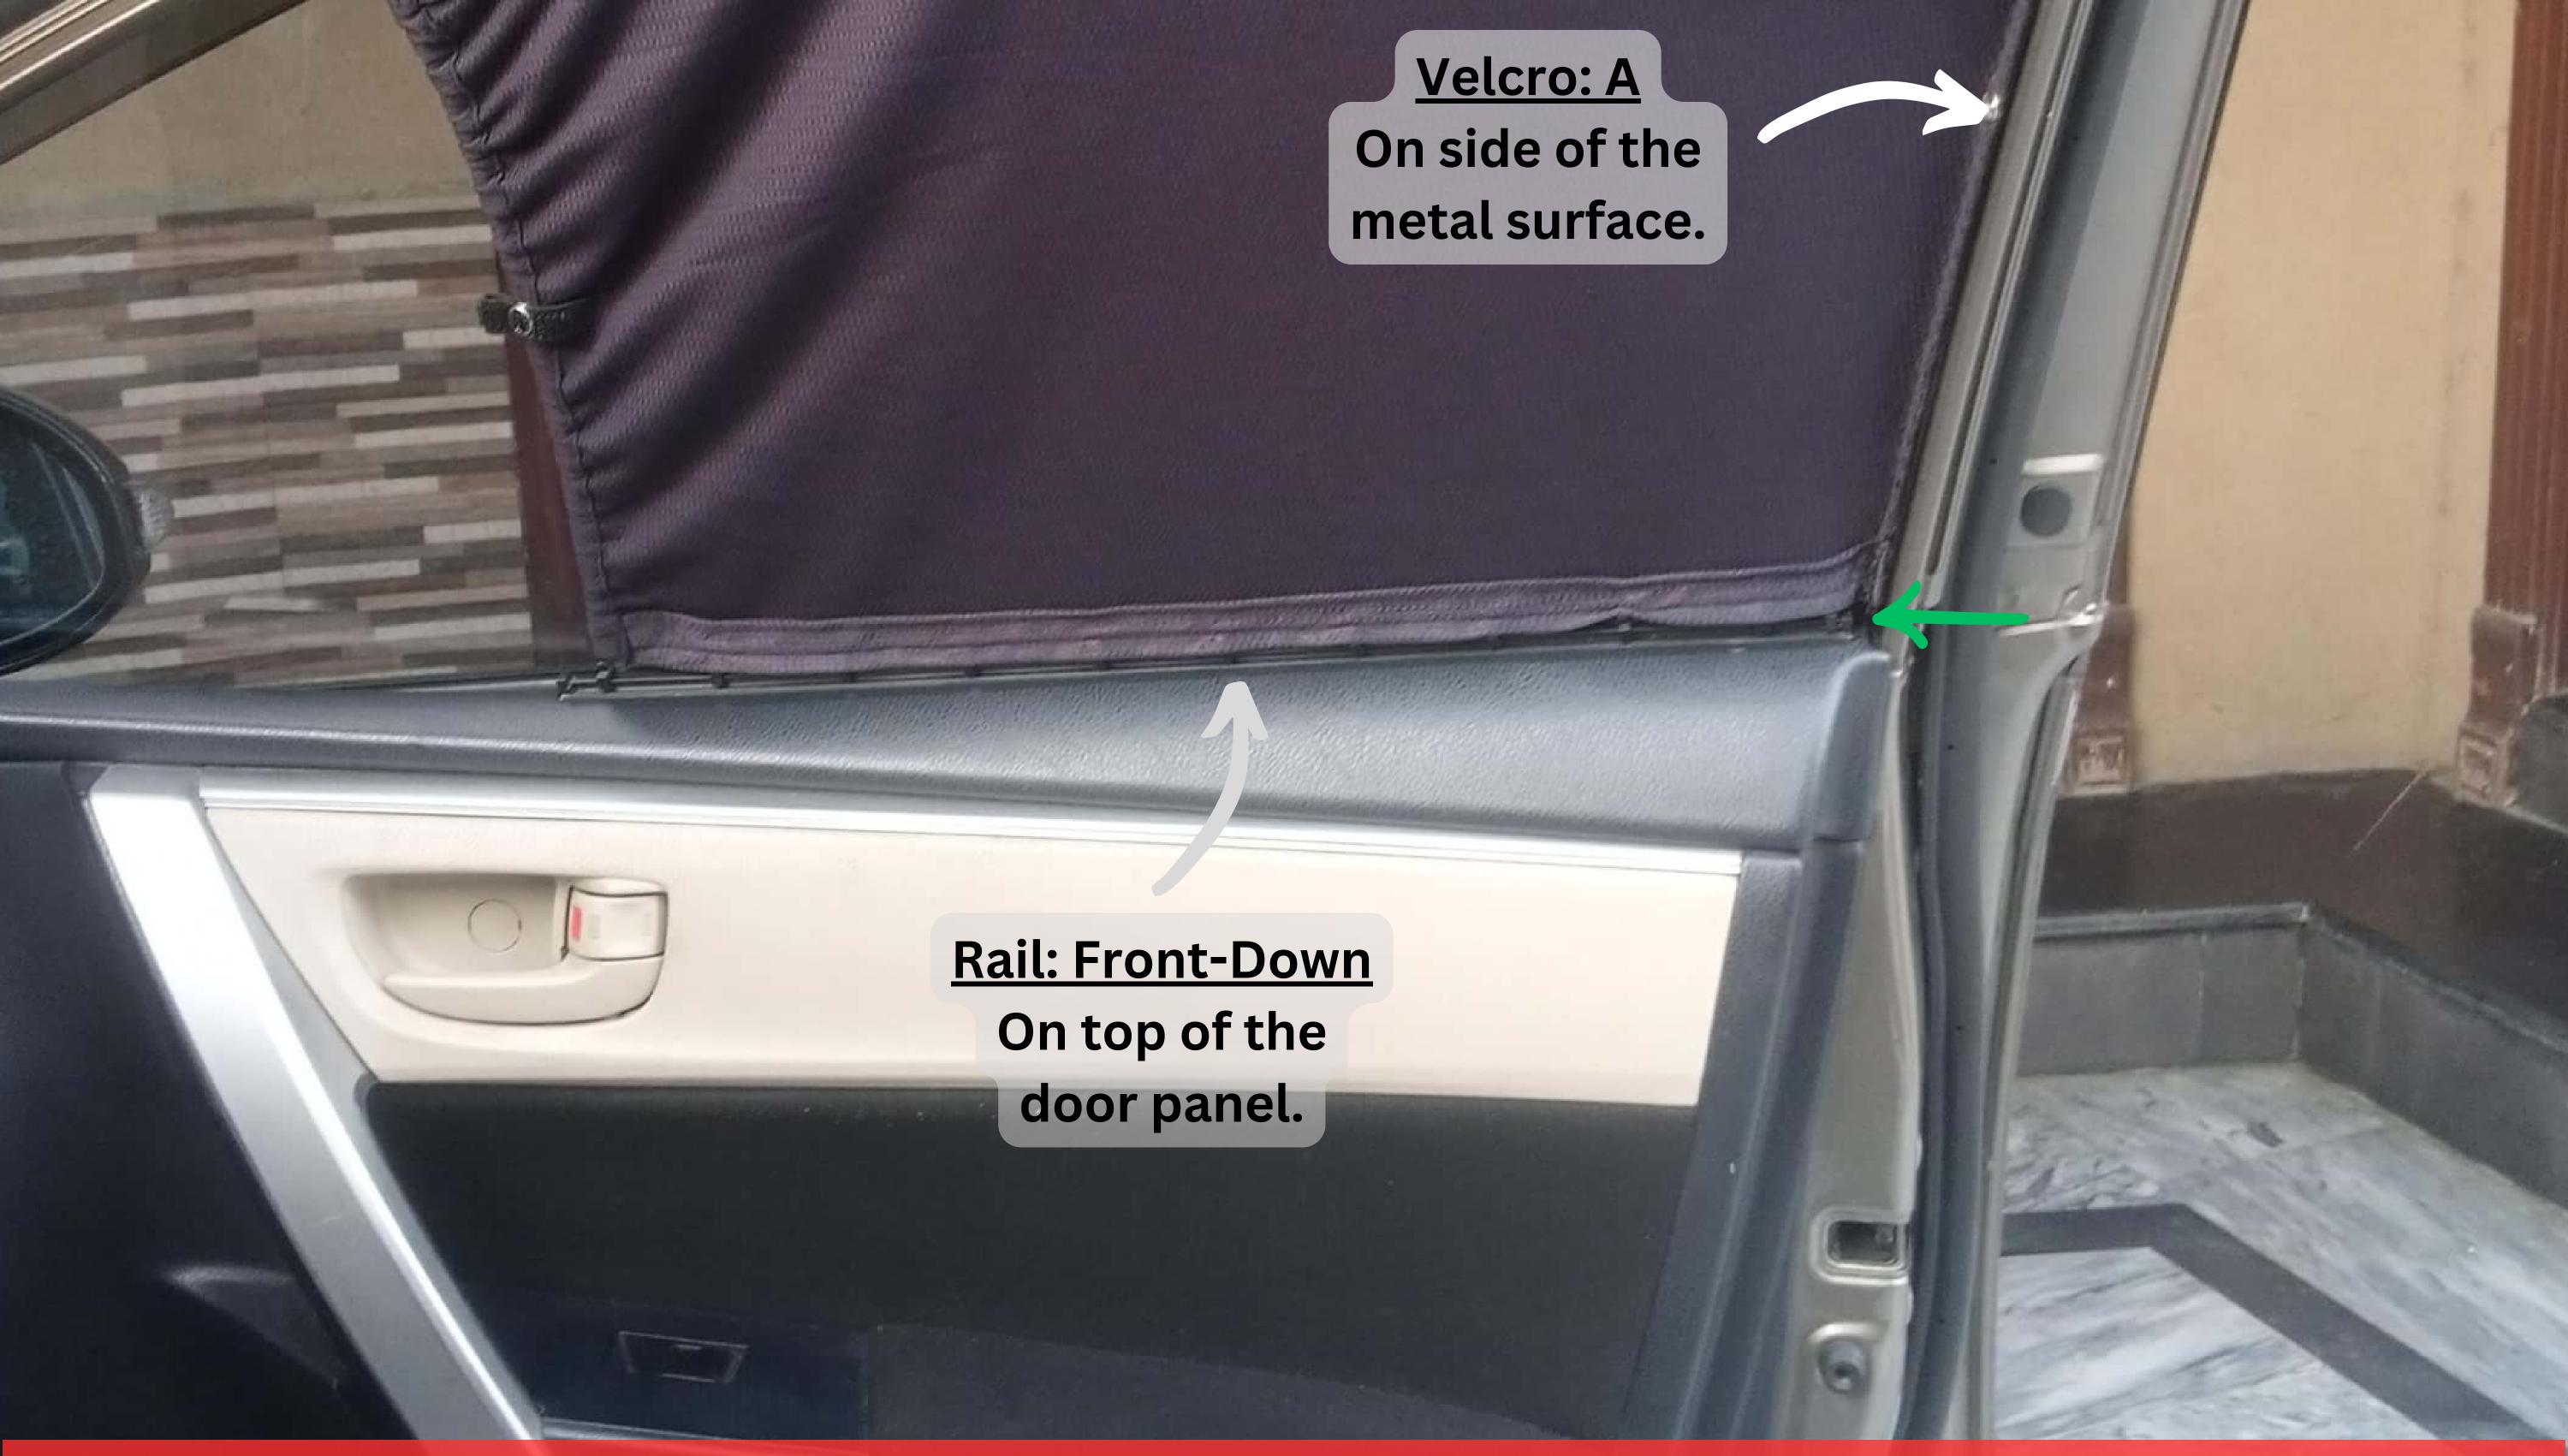

NOTE: ZOOM IN ON THE IMAGE TO BETTER UNDERSTAND THE PLACEMENT



Rail: Back-Up On base of the metal surface. Hold the <u>Back-up</u> rail firmly with one hand while pasting with the other hand at this point.



NOTE: ZOOM IN ON THE IMAGE TO BETTER UNDERSTAND THE PLACEMENT